BASOR J-HOOKS





BASIC J-HOOKS









90° ANGLE CLIP J-HOOKS











BATWING J-HOOKS

3/4" Basic J-Hook assembled to Batwing Clip









1/4" FLANGE HAMMER ON J-HOOKS

3/4" Basic J-Hook assembled to 1/4" Flange Hammer On









1/2" FLANGE HAMMER ON J-HOOKS

3/4" Basic J-Hook assembled to 1/2" Flange Hammer On









Mild Carbon Steel and Galvanized Yellow Zinc

BASOR J-HOOKS





DESCRIPTION	SIZE	PACKAGE	ZN
DESCRIPTION	SIZE	PAURAUE	Ref.
3/4" Standard J-Hook Size 12	3/4"	100	BEJH12
1-5/16" Standard J-Hook Size 21	1-5/16"	100	BEJH21
2" Standard J-Hook Size 32	2"	100	BEJH32
4" Standard J-Hook Size 64	4"	25	BEJH64

DESCRIPTION	SIZE	PACKAGE	ZN	
DESCRIPTION	SIZE	PAGRAGE	Ref.	
3/4" Standard J-Hook Size 12 assembled to 90° Angle Clip	3/4"	100	BEJH12AC	
1-5/16" Standard J-Hook Size 21 assembled to 90° Angle Clip	1-5/16"	100	BEJH21AC	
2" Standard J-Hook Size 32 assembled to 90° Angle Clip	2"	100	BEJH32AC	
4" Standard J-Hook Size 64 assembled to 90° Angle Clip	4"	25	BEJH64AC	

DESCRIPTION	SIZE	PACKAGE	ZN
DESCRIPTION	SIZE	PAGRAGE	Ref.
3/4" Standard J-Hook Size 12 assembled to Batwing Clip	3/4"	100	BEJH12W
1-5/16" Standard J-Hook Size 21 assembled to Batwing Clip	1-5/16"	100	BEJH21W
2" Standard J-Hook Size 32 assembled to Batwing Clip	2"	100	BEJH32W
4" Standard J-Hook Size 64 assembled to Batwing Clip	4"	25	BEJH64W

DECORIDATION	SIZE	PACKAGE	ZN
DESCRIPTION	SIZE		Ref.
3/4" Standard J-Hook Size 12 assembled to 1/4" Flange Hammer On	3/4"	100	BEJH12HOK24
1-5/16" Standard J-Hook Size 21 assembled to 1/4" Flange Hammer On	1-5/16"	100	BEJH21HOK24
2" Standard J-Hook Size 32 assembled to 1/4" Flange Hammer On	2"	100	BEJH32HOK24
4" Standard J-Hook Size 64 assembled to 1/4" Flange Hammer On	4"	25	BEJH64HOK24

DESCRIPTION	SIZE	PACKAGE	ZN	
DESCRIPTION	SIZE	PAGRAGE	Ref.	
3/4" Standard J-Hook Size 12 assembled to 1/2" Flange Hammer On	3/4"	100	BEJH12HOK58	
1-5/16" Standard J-Hook Size 21 assembled to 1/2" Flange Hammer On	1-5/16"	100	BEJH21HOK58	
2" Standard J-Hook Size 32 assembled to 1/2" Flange Hammer On	2"	100	BEJH32HOK58	
4" Standard J-Hook Size 64 assembled to 1/2" Flange Hammer On	4"	25	BEJH64HOK58	

ZN – Electrozinc Coating

HPH J-HOOKS BEBASO




PERFORMANCE









HPH CABLE CAPACIT


70 % FILL RATE CABLE CAPACITY CHART

Part No.	Area	Hook Diameter	CAT 5e Capacity	CAT 6 Capacity	Cat 6a Capacity
HPH16	1.07 in2	1"	20	15	10
HPH32	3.97 in2	2"	90	60	35
HPH48	9.26 in2	3°	200	150	80
HPH64	15.48 in2	4"	330	220	140

Cable capacity is calculated based on a 70% fill rate.

Actual capacity may vary due to CAT cable outside diameter variances by type and manufacturer.

Consult with the cable manufacturer to insure the correct cable outside diameter is being used during calculations.



HPH CABLE CAPACITY

100 % FILL RATE CABLE CAPACITY CHART

Part No.	Area	Hook Diameter	CAT 5e Capacity	CAT 6 Capacity	Cat 6a Capacity
HPH16	1.07 in2	1"	29	22	14
HPH32	3.97 in2	2"	129	86	50
HPH48	9.26 in2	3"	286	215	115
HPH64	15.48 in2	4*	472	315	200

Cable capacity is calculated based on a 100% fill rate.

Actual capacity may vary due to CAT cable outside diameter variances by type and manufacturer.

Consult with the cable manufacturer to insure the correct cable outside diameter is being used during calculations.

NEW! HPH J-Hook Trees

9 ATTACHMENT OPTIONS

• 90° Angle Clips with 1/4" or 3/8" hole

• Threaded Couplings 1/4" - 20 or 3/8" - 16

 Screw-on Beam Clamp for Flanges 1/8" - 1/2"

• 360° Hammer-on's for flanges 1/8" - 1/4" or 5/16" - 1/2"



Part #: HPH32-DS-2-NA

FEATURES

- Available in 1-4 tiers
- Hooks Available in: 1", 2", 3" & 4"
- cULus listed attachments
- Built-in snap-lock latch
- TIA Compliant & Plenum rated

Part #: HPH32-DS-2-ACSSBC PATENTED



HIGH PERFORMANCE HYBRID

Item No.	Hook Size	Hook Count	Item No.		Hook Count	Item No.	Hook Size	Hook Count	Item No.	Hook Size	Hook Count
1" HOOK TR	REES		2" HOOK TE	REES		3" HOOK TE	REES		4" HOOK TI	REES	
J-HOOK TREES w/ NO	ATTAC	CHMEN	T								
HPH16-DS-1-NA	1"	1	HPH32-DS-1-NA	2"	1	HPH48-DS-1-NA	3"	1	HPH64-DS-1-NA	4"	1
HPH16-DS-2-NA	1"	2	HPH32-DS-2-NA	2"	2	HPH48-DS-2-NA	3"	2	HPH64-DS-2-NA	4"	2
HPH16-DS-3-NA	1"	3	HPH32-DS-3-NA	2"	3	HPH48-DS-3-NA	3"	3	HPH64-DS-3-NA	4"	3
HPH16-DS-4-NA	1"	4	HPH32-DS-4-NA	2"	4	HPH48-DS-4-NA	3"	4	HPH64-DS-4-NA	4"	4
J-HOOK TREES w/ 90°	ANGL	E CLIP	- 1/4" HOLE								
HPH16-DS-1-AC	1"	1	HPH32-DS-1-AC	2"	1	HPH48-DS-1-AC	3"	1	HPH64-DS-1-AC	4"	1
HPH16-DS-2-AC	1"	2	HPH32-DS-2-AC	2"	2	HPH48-DS-2-AC	3"	2	HPH64-DS-2-AC	4"	2
HPH16-DS-3-AC	1"	3	HPH32-DS-3-AC	2"	3	HPH48-DS-3-AC	3"	3	HPH64-DS-3-AC	4"	3
HPH16-DS-4-AC	1"	4	HPH32-DS-4-AC	2"	4	HPH48-DS-4-AC	3"	4	HPH64-DS-4-AC	4"	4
J-HOOK TREES w/ 90°	ANGL	E CLIP	- 3/8" HOLE								
HPH16-DS-1-AC6	1"	1	HPH32-DS-1-AC6	2"	1	HPH48-DS-1-AC6	3"	1	HPH64-DS-1-AC6	4"	1
HPH16-DS-2-AC6	1"	2	HPH32-DS-2-AC6	2"	2	HPH48-DS-2-AC6	3"	2	HPH64-DS-2-AC6	4"	2
HPH16-DS-3-AC6	1"	3	HPH32-DS-3-AC6	2"	3	HPH48-DS-3-AC6	3"	3	HPH64-DS-3-AC6	4"	3
HPH16-DS-4-AC6	1"	4	HPH32-DS-4-AC6	2"	4	HPH48-DS-4-AC6	3"	4	HPH64-DS-4-AC6	4"	4
	REW-C	N SPF	RING STEEL BEAM CLA	_	R FLAN			1200	111111111111111111111111111111111111111		
HPH16-DS-1-SSBC	1"	1	HPH32-DS-1-SSBC	2"	1	HPH48-DS-1-SSBC	3"	1	HPH64-DS-1-SSBC	4"	1
HPH16-DS-2-SSBC	1"	2	HPH32-DS-2-SSBC	2"	2	HPH48-DS-2-SSBC	3"	2	HPH64-DS-2-SSBC	4"	2
HPH16-DS-3-SSBC	1"	3	HPH32-DS-3-SSBC	2"	3	HPH48-DS-3-SSBC	3"	3	HPH64-DS-3-SSBC	4"	3
HPH16-DS-4-SSBC	1"	4	HPH32-DS-4-SSBC	2"	4	HPH48-DS-4-SSBC	3"	4	HPH64-DS-4-SSBC	4"	4
			1111	_		IGES 1/8" - 1/2" THICK (1	111 1104 00 4 0000	-	-
HPH16-DS-1-ACSSBC	1"	1	HPH32-DS-1-ACSSBC	2"	1	HPH48-DS-1-ACSSBC	3"	1	HPH64-DS-1-ACSSBC	4"	1
HPH16-DS-2-ACSSBC	1"	2	HPH32-DS-2-ACSSBC	2"	2	HPH48-DS-2-ACSSBC	3"	2	HPH64-DS-2-ACSSBC	4"	2
HPH16-DS-3-ACSSBC	1"	3	HPH32-DS-3-ACSSBC	2"	3	HPH48-DS-3-ACSSBC	3"	3	HPH64-DS-3-ACSSBC	4"	3
HPH16-DS-4-ACSSBC	1"	4	HPH32-DS-4-ACSSBC	2"	4	HPH48-DS-4-ACSSBC	3"	4	HPH64-DS-4-ACSSBC	4"	4
			AM CLAMP FOR FLANG	_			- 0		111 1104-DO-4-ACCOODC		
HPH16-DS-1-FM24	1"	1	HPH32-DS-1-FM24	2"	1	HPH48-DS-1-FM24	3"	1	HPH64-DS-1-FM24	4"	1
HPH16-DS-2-FM24	1"	2	HPH32-DS-2-FM24	2"	2	HPH48-DS-2-FM24	3"	2	HPH64-DS-2-FM24	4"	2
HPH16-DS-3-FM24	1"	3	HPH32-DS-3-FM24	2"	3	HPH48-DS-3-FM24	3"	3	HPH64-DS-3-FM24	4"	3
HPH16-DS-4-FM24	1"	4	HPH32-DS-4-FM24	2"	4	HPH48-DS-4-FM24	3"	4	HPH64-DS-4-FM24	4"	4
			AM CLAMP FOR FLANG				3	4	HFH04-D3-4-FIVIZ4	4	4
HPH16-DS-1-FM58	1"	ON BE	HPH32-DS-1-FM58	2"	1	HPH48-DS-1-FM58	3"	1	HPH64-DS-1-FM58	4"	1
HPH16-DS-1-FM58	1"	2	HPH32-DS-2-FM58	2"	2	HPH48-DS-2-FM58	3"	2	HPH64-DS-2-FM58	4"	2
HPH16-DS-3-FM58	1"	3	HPH32-DS-3-FM58	2"	3	HPH48-DS-3-FM58	3"	3	HPH64-DS-3-FM58	4"	3
HPH16-DS-4-FM58	1"	4	HPH32-DS-4-FM58	2"	4	HPH48-DS-4-FM58	3"	4	HPH64-DS-4-FM58	4"	4
The state of the s			FEMALE THREADED E				3	-4	HFH04-D3-4-FW30	4	-4
HPH16-DS-1-EC14	1"	1	HPH32-DS-1-EC14	2"	1	HPH48-DS-1-EC14	3"	1	HPH64-DS-1-EC14	4"	1
HPH16-DS-1-EC14	1"	100	HPH32-DS-1-EC14	2"	2	HPH48-DS-1-EC14	3"	2	HPH64-DS-1-EC14	4"	1 2
		2									
HPH16-DS-3-EC14	1"	3	HPH32-DS-3-EC14	2"	3	HPH48-DS-3-EC14	3"	3	HPH64-DS-3-EC14	4"	3
HPH16-DS-4-EC14	1"	4	HPH32-DS-4-EC14	2"	4	HPH48-DS-4-EC14	3"	4	HPH64-DS-4-EC14	4"	4
	Name and Address of the Owner, where the Owner, which is the Owner, which is the Owner, where the Owner, which is the Owner,	ALL DESCRIPTION OF THE PARTY OF	FEMALE THREADED EY	Name and Address of the Owner, where	Statement of the last		011		LIBUOA DO A FOCO	411	
HPH16-DS-1-EC38	1"	1	HPH32-DS-1-EC38	2"	1	HPH48-DS-1-EC38	3"	1	HPH64-DS-1-EC38	4"	1
HPH16-DS-2-EC38	1"	2	HPH32-DS-2-EC38	2"	2	HPH48-DS-2-EC38	3"	2	HPH64-DS-2-EC38	4"	2
HPH16-DS-3-EC38	1"	3	HPH32-DS-3-EC38	2"	3	HPH48-DS-3-EC38	3"	3	HPH64-DS-3-EC38	4"	3
HPH16-DS-4-EC38	1"	4	HPH32-DS-4-EC38	2"	4	HPH48-DS-4-EC38	3"	4	HPH64-DS-4-EC38	4"	4













NEW! HPH J-Hook Trees

HIGH PERFORMANCE HYBRID

COLOR CODING

- White
- Red
- Blue
- Black
- Green
- Yellow





Special order colors available

FEATURES

- Available in 1-4 tiers
- Hooks A∨ailable in: 1", 2", 3" & 4"
- cULus listed attachments
- Built-in snap-lock latch
- TIA Compliant & Plenum rated











BASOR ELECTRIC HIGH PERFORMANCE HYBRID J-HOOKS





OPTIMUM BEND RADIUS

Item No.	Size	Radius
HPH16	1"	3.8560"
HPH32	2"	3.3495"
HPH48	3"	3.5792"
HPH64	4"	3.5100"



NOTE: A MITUTOYO CONTOUR TRACER CV-524 WAS USED TO TRACE THE ACTUAL CROSS-SECTION CONTOUR OF THE J-HOOKS. BEND RADIUS WAS FIT TO THE RAW DATA TO SIMULATE THE CONTACT OF THE CABLES IN THE J-HOOK.

NEW! HPH Magnet J-Hook

HIGH PERFORMANCE HYBRID

2 ATTACHMENT STYLES

- Easy installation
- Top or side mount
- Heavy Duty magnet
- Removable & reusable

HPH Magnet Part #'s:

Part No.	Area	Hook Diameter	CAT 5e Capacity	CAT 6 Capacity	Cat 6a Capacity
HPH16PM	1.07 in2	1"	20	15	10
HPH32PM	3.97 in2	2"	90	60	35
HPH16PMSM	1.07 in2	1"	20	15	10
HPH32PMSM	3.97 in2	2"	90	60	35

FEATURES

- Available in top or side mount
- Hooks Available in 1" & 2"
- Built-in snap-lock latch
- Available in White, Red, Blue or Black
- TIA Compliant & Plenum Rated











NEW! PM90 Pot Magnets

RARE-EARTH MAGNETS & ASSEMBLIES



Part #: BR4T200PM



Part #: HPH16PM Top mount



Part #: HPH32PMSM Side mount



Item No.	Size	Description	Color	Box QTY
BR4T125PM	1.25"	1/4"-20 x 1-1/4" Bridle ring assembled to PM90 pot magnet	N/A	10 pcs
BR4T200PM	2"	1/4"-20 x 2" Bridle ring assembled to PM90 pot magnet	N/A	10 pcs
HPH16PM	1"	Top mount HPH J-Hook assembled to PM90 pot magnet	White	10 pcs
HPH16PMSM	1"	Side mount HPH J-Hook assembled to PM90 pot magnet	White	10 pcs
HPH32PM	2"	Top mount HPH J-Hook assembled to PM90 pot magnet	White	10 pcs
HPH32PMSM	2"	Side mount HPH J-Hook assembled to PM90 pot magnet	White	10 pcs

Color coded HPH's - call for availability







NEW! PM90 Pot Magnets

HIGH QUALITY RARE-EARTH MAGNETS








Part #: PM90


Description: Pot magnet with 1/4"-20 x 1/2" female threads

Breakaway Strength: 90 lbs.

Box QTY: 10 PCS

Master Carton QTY: 10 x 10 PCS

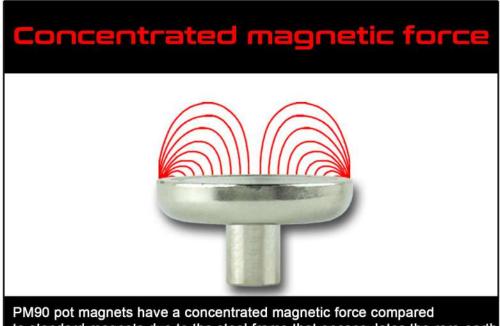









HPH Mounting Rails



Build your own rigid support brackets!



Item No.	Description	Width	Length	QTY
HPHTS	Mouting rail with 1/4" through holes	1-1/8"	30"	1 рс
HPHTL	Mouting rail with 1/4" through holes	1-1/2"	49"	1 рс
HPHRS	Mouting rail with 1/4"-20 threaded impressions	1-1/8"	30"	1 рс
HPHRL	Mouting rail with 1/4"-20 threaded impressions	1-1/2"	49"	1 pc

Call for custom lengths!

NEW! Temporary Cable Support

HIGH PERFORMANCE HYBRID



Part #: TCS-HPH32-R-24

- Specially designed as a reusable, temporary support to keep cables & cords off the ground.
- 3" diameter grappling hook fits over standard structural members such as joists.
- Install & uninstall from the ground using the Quic Stic[™] telescoping pole tool (pictured).

COLOR OPTIONS



FEATURES


- Improves safety
- Built-in snap-lock latch
- Plenum rated
- HPH J-Hooks available in: 1", 2", 3" & 4"
- Available in 1, 2 & 3 ft. lengths
- Colors: White, Black, Blue, Red, Green & Yellow

Snap-lock latch


Part #:
Quic Stic



Temporary Cable Support

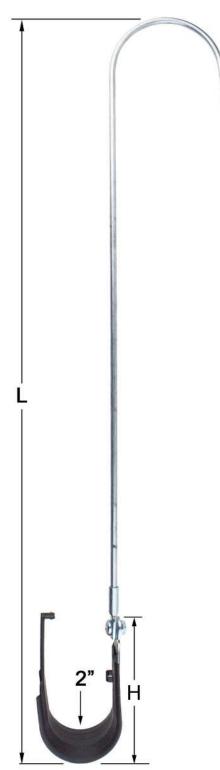

Part #: TCS-HPH32-BK-24

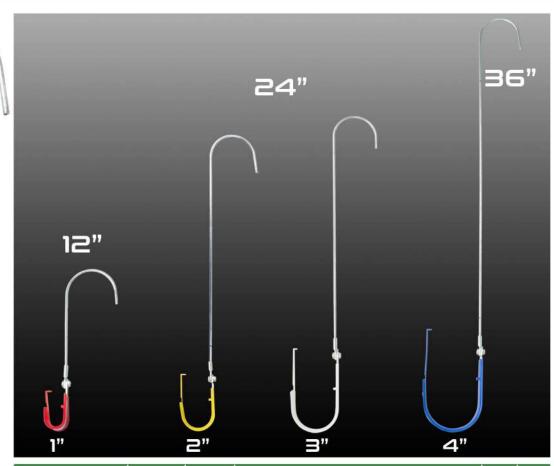

Part No.	J-Hook Size	Color	Description	Н	L
TCS-HPH16-12	1"	White	J-Hook assembled to grappling hook	3.5"	12"
TCS-HPH16-24	1"	White	J-Hook assembled to grappling hook	3.5"	24"
TCS-HPH16-36	1"	White	J-Hook assembled to grappling hook	3.5"	36"
TCS-HPH32-12	2"	White	J-Hook assembled to grappling hook	4.5"	12"
TCS-HPH32-24	2"	White	J-Hook assembled to grappling hook	4.5"	24"
TCS-HPH32-36	2"	White	J-Hook assembled to grappling hook	4.5"	36"
TCS-HPH48-12	3"	White	J-Hook assembled to grappling hook	6.5"	12"
TCS-HPH48-24	3"	White	J-Hook assembled to grappling hook	6.5"	24"
TCS-HPH48-36	3"	White	J-Hook assembled to grappling hook	6.5"	36"
TCS-HPH64-12	4"	White	J-Hook assembled to grappling hook	7"	12"
TCS-HPH64-24	4"	White	J-Hook assembled to grappling hook	7"	24"
TCS-HPH64-36	4"	White	J-Hook assembled to grappling hook	7"	36"

Contact us for additional color part numbers

NEW! Temporary Cable Support



Part #: TCS-JH32-24

BENEFITS

- Specially designed as a reusable, temporary support to keep cables & cords off the ground.
- 3" diameter grappling hook fits over standard structural members such as joists.
- Install & uninstall from the ground using the Quic Stic telescoping pole tool (pictured).

FEATURES

- Improves safety
- All metal construction
- J-Hooks available in: 2" & 4"
- Available in 1, 2 & 3 ft. lengths





Temporary Cable Support

